

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018111 A1

(51) International Patent Classification⁷: **B05B 11/00**,
B65D 83/16

[GB/GB]; 35 Fairfield Rise, Wollaston, Stourbridge, West Midlands DY8 3PQ (GB). **RODD, Timothy** [GB/GB]; Chart House, Sandy Lane, Lyndhurst, Hants SO43 7DN (GB).

(21) International Application Number:
PCT/GB2003/003762

(22) International Filing Date: 22 August 2003 (22.08.2003)

(74) Agents: **CROFT, Michael, John et al.**; Wilson Gunn Skerrett, Charles Street, 148/9 Great Charles Street, Birmingham B3 3HT (GB).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0219641.8	23 August 2002 (23.08.2002)	GB
0226867.0	19 November 2002 (19.11.2002)	GB
0303698.5	18 February 2003 (18.02.2003)	GB
0305597.7	12 March 2003 (12.03.2003)	GB
0308909.1	17 April 2003 (17.04.2003)	GB
0310244.9	3 May 2003 (03.05.2003)	GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **INCRO LIMITED** [GB/GB]; 35 Fairfield Rise, Wollaston, Stourbridge, West Midland DY8 3PQ (GB).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **LAIDLER, Keith**

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: OUTLET DEVICE FOR A CONTAINER OR VESSEL

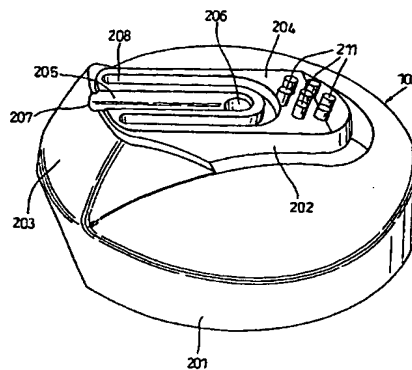

(57) Abstract: The present invention relates to an outlet device and nozzle arrangement adapted to be fitted to a pressurised and non-pressurised vessels or containers respectively and to permit fluid present in said vessels or containers to be dispensed under pressure. Both the outlet device and the nozzle arrangement have bodies which define an inlet, an outlet and an internal fluid flow passageway through which fluid can flow from said inlet to said outlet. In addition, the bodies of the outlet device and the nozzle arrangement of the present invention additionally comprises a resiliently deformable wall member which defines an internal surface of fluid flow passageway and which is configured such that, when fluid is caused to flow through the outlet device/nozzle arrangement under pressure, the resiliently deformable wall undergoes a resilient deformation from an initial resiliently-biased configuration in which the passageway is closed to a distended configuration whereby fluid can flow through the passageway and be dispensed through the outlet. Furthermore, the resiliently deformable wall is configured to revert to the initial resiliently biased configuration when the operation of the actuator means is ceased and thereby cause any fluid remaining in said portion of the passageway to be expelled.

WO 2004/018111 A1

Best Available Copy